


**The XL Bubble is made of pure polyurethane and is designed to increase comfort while reducing tripping hazards, body aches, quality issues, and sick leaves. This is the ultimate mat for dry environments or where static control is a must.**

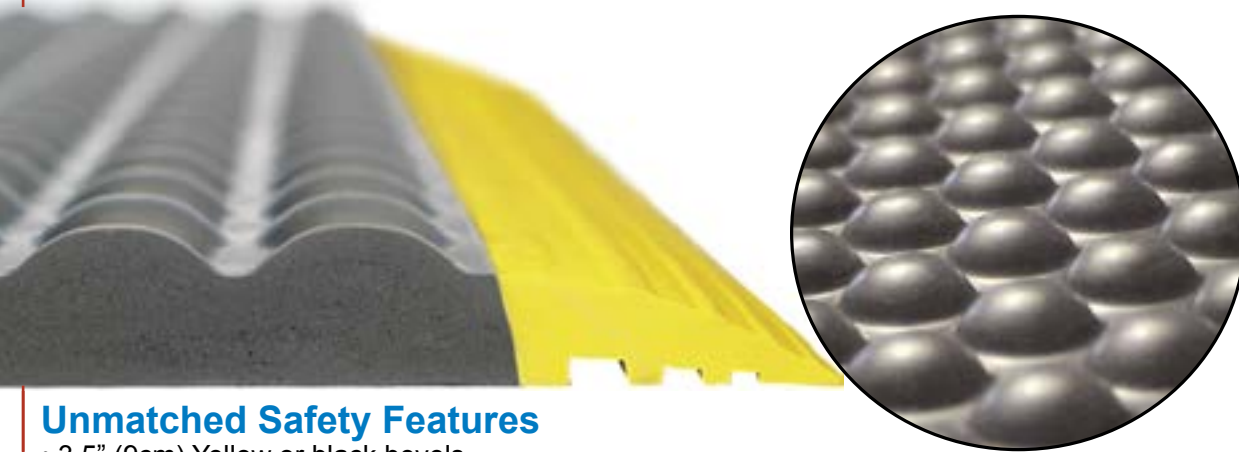

### Unmatched Safety Features

- 3.5" (9cm) Yellow or black bevels
  - They will never curl up, eliminating tripping hazards
- Any size, any shape mat, always in one piece
  - No overlapping or worn-out connecting mats, also eliminating tripping hazards
- 1" (2.5cm) Thickness

### Highest Quality

- Virgin raw material only
  - Unbeaten durability and ergonomic relief
- Not only anti-fatigue, but also true ergonomic benefits
  - Unique ergonomic designs, eliminating and preventing common problems encountered in standing environments stimulating the body to increase blood circulation and alertness that will reduce sick leave, workers' compensation and quality issues.
  - Solid mat throughout; no hollow bubbles that collapse

### The XL Bubble Mat Advantage

- Solid mat throughout, no hollow bubbles that collapse.
  - Long-term solution to keep the "bounce back" effect throughout the warranty period.
- Anti-static properties
- Silicone & latex-free
- Cleanroom ISO Class 5 (100)

## 8-Year Warranty

All lines are conditionally warranted against normal usage\* 24 hours a day, 7 days a week. The warranty does not cover damage caused by the mat being dragged or pulled from a heavy load or items being pushed or dragged across the product, such as skids or pallets. The warranty against chemicals, oils, liquids, or other matter differs with the type of mat. Please consult your dealer or an Rep to select the correct mat for your environment. The warranty periods starts from the date of purchase. The warranty only covers the replacement of the product, no direct or indirect costs are covered.

\* It is considered normal usage when a person stands or walks on the with regular footwear in an environment where the temperature is under 25° C (77° F) and the humidity is below 80%.

*This mat requires add-on bevels. It can also be supplied with holes for drainage and air flow.*

**DMR XL Bubble Mat**

**DMR**

CONTRADA CERRETO 403, MIGLIANICO (ch) 66010. EMAIL- [info@dmrleanmanufacturing.it](mailto:info@dmrleanmanufacturing.it)



MATTING



DURASTRIPE



FURNITURE



FIRST AID



FACILITY SAFETY



LED SOLUTIONS

**DMR XL Bubble**

<b>Properties</b>	<b>Standard</b>	
<b>Material</b>		Foamed Polyurethane
<b>Color</b>		Anthracite
<b>Weight</b>		3900 g +/- 50 g // 8.6 lbs +/- 0.1 lbs
<b>Length without beveled edges</b>		89 cm +/- 1% // 35" +/- 0.38"
<b>Width without beveled edges</b>		59 cm +/- 1% // 23.25" +/- 0.38"
<b>Thickness</b>		25 mm // 1"
<b>Density</b>	ISO 2781	380 kg/m <sup>3</sup> +/- 10 %
<b>Hardness</b>	DIN 53505	22-30 Sh A
<b>Compression Pressure face = ø 100mm % by pressure of 240kg</b>	Tinby A/S Standard	50%
<b>Abrasion Load = 5 N</b>	ISO 46 49 (5 N)	180 mm <sup>3</sup> // 7 in <sup>3</sup>
<b>Breaking Point / tensile strength</b>	EN ISO 527-1	2 Mpa
<b>Elongation at break</b>	EN ISO 527-1	500%
<b>Tearing strength</b>	ASTM D 624	4 N/mm
<b>Electrical Resistance Surface point to point % 50 RH</b>	ESD STM7	1 x 10 <sup>9</sup> Ω - 5 x 10 <sup>9</sup> Ω
<b>Fire behavior</b>	EN 13501-1 (DIN 4102-B1 Part 14)	Not Tested
<b>Thermal properties</b> Minimum use Maximum use Maximum short duration	The ergonomic properties remain	0°C // 32°F 25°C // 77°F 40°C // 115°F
<b>UV-resistance</b>		Inferior
<b>Hydrolytic resistance</b>		Inferior
<b>Warranty</b>	EN ISO 14644-1	8 years